


H03V2V2-F

PVC INSULATED AND SHEATHED FLEXIBLE CABLE

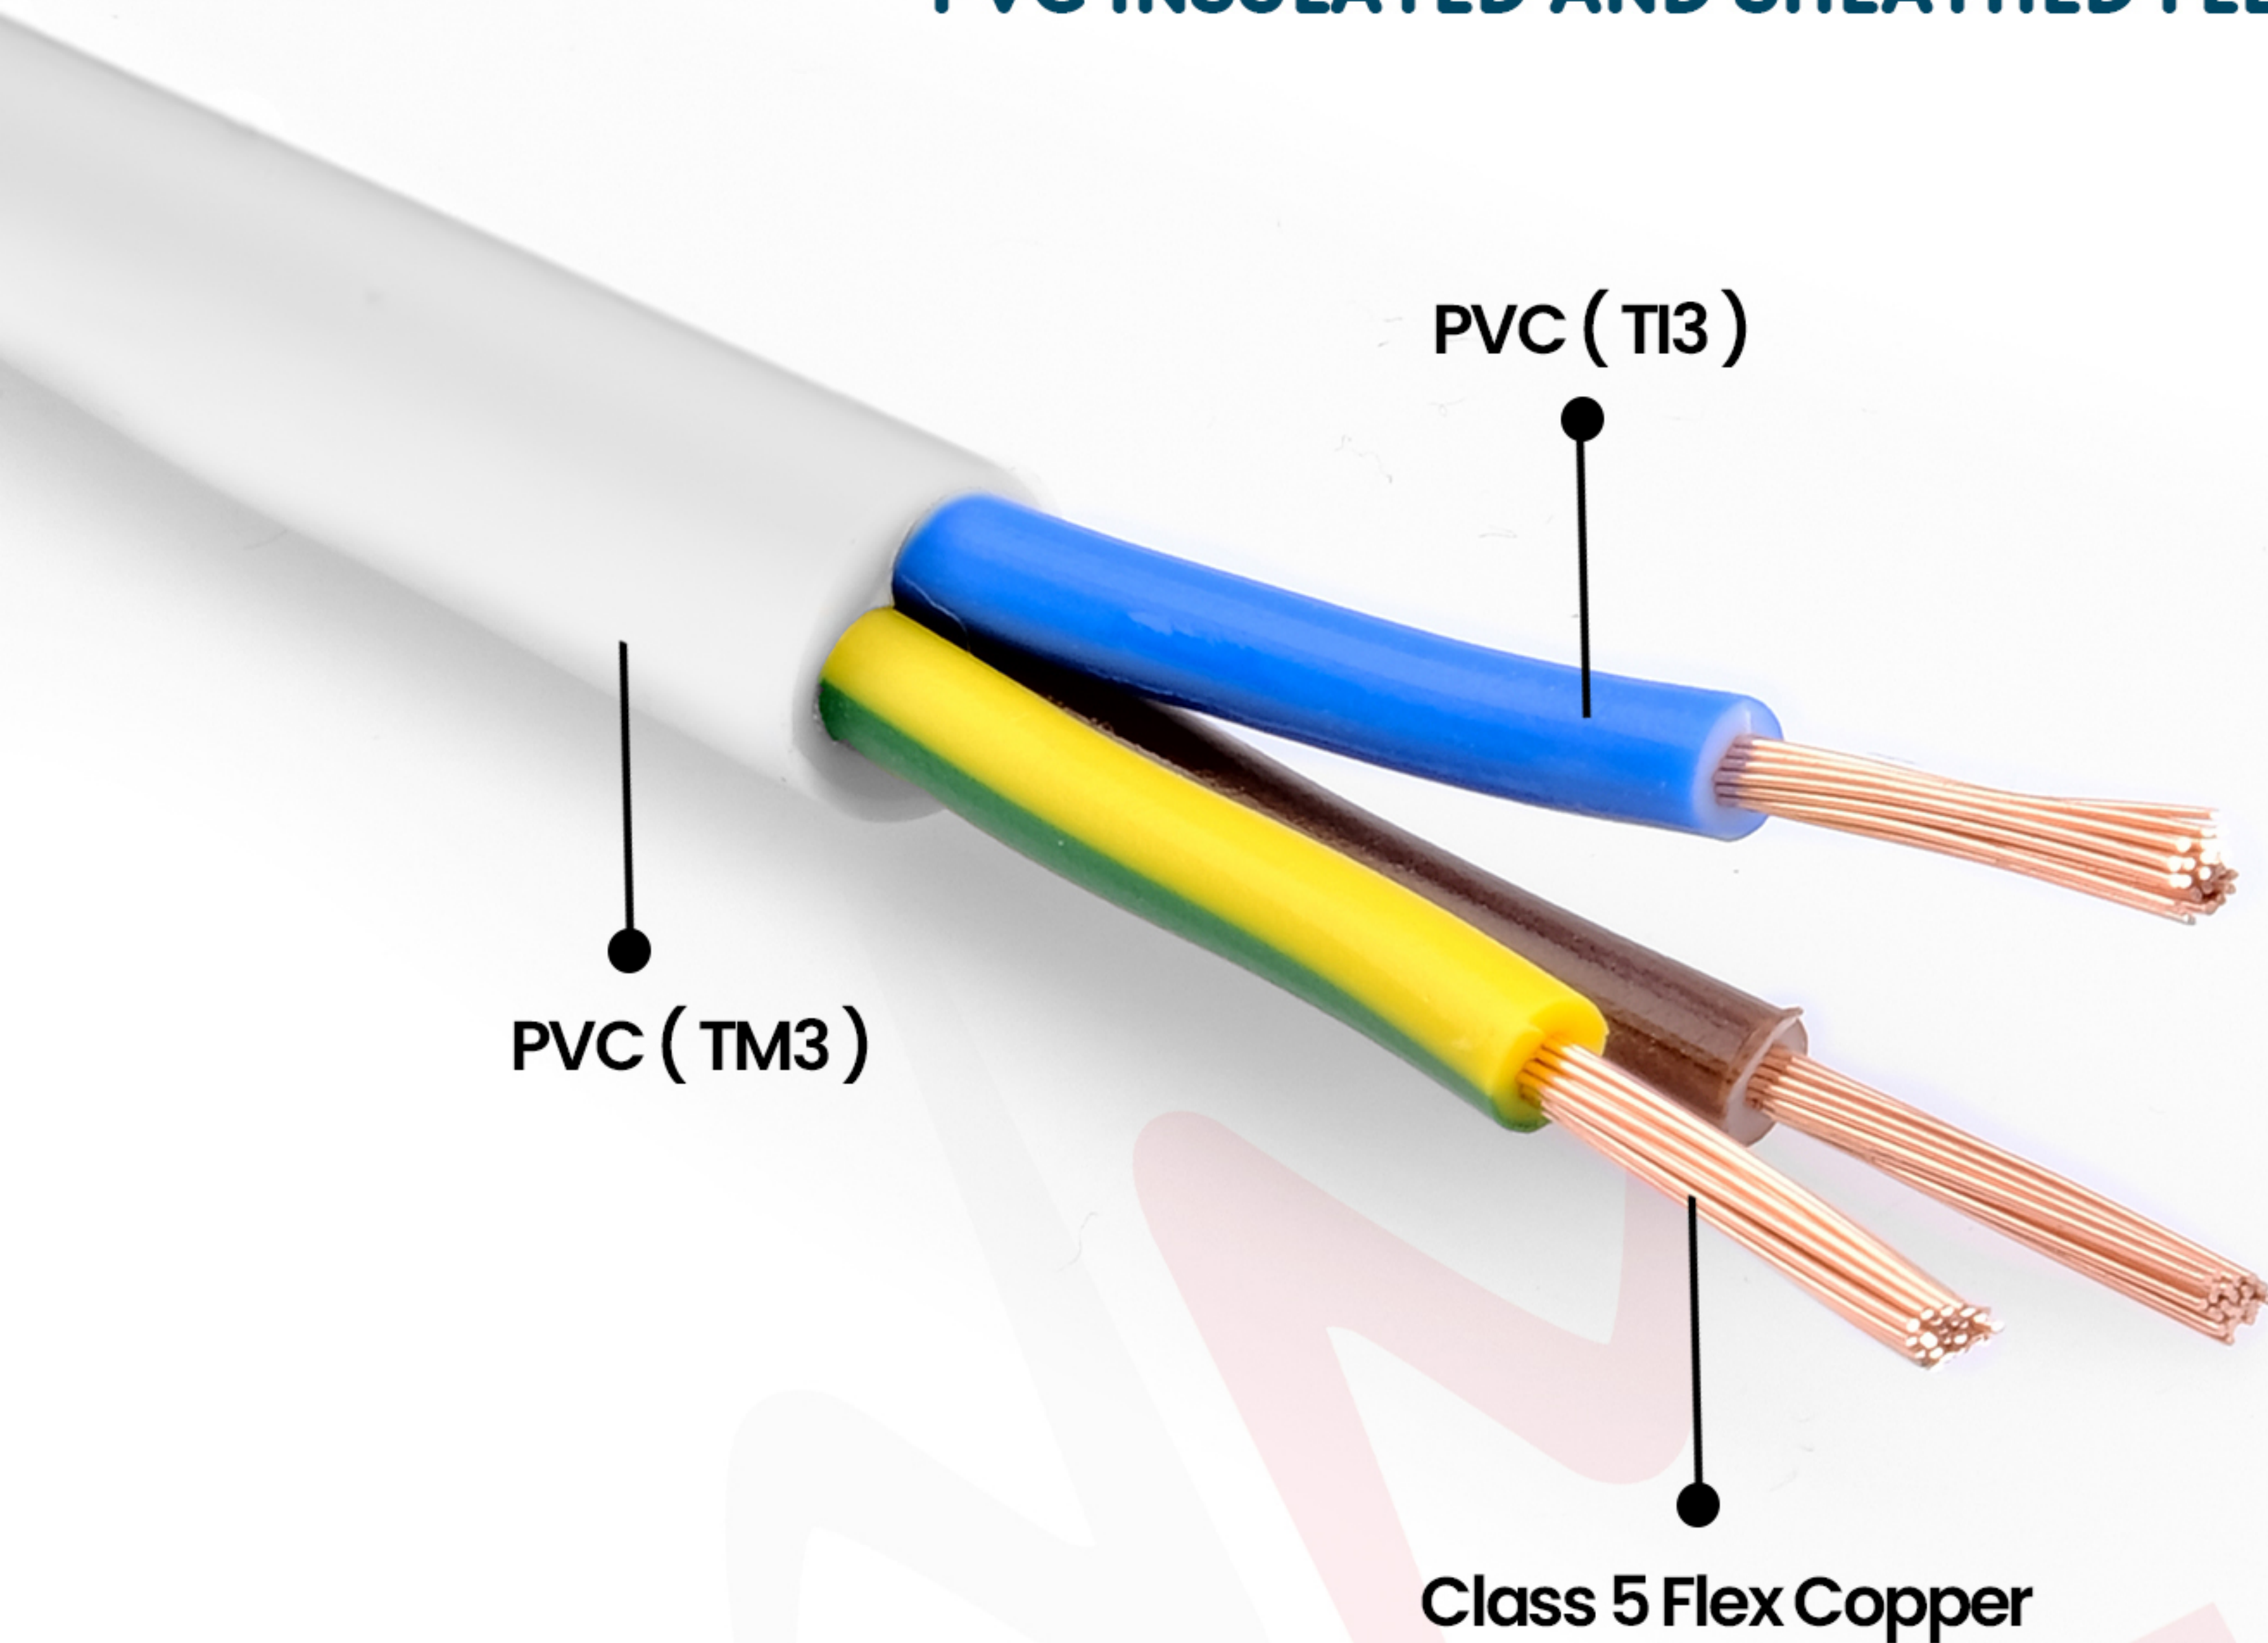

TYPE: H03V2V2-F

STANDARDS: BS EN 50525-2-11:2011

TECHNICAL DATA:

Max. Operating Temperature: -5 °C to +90 °C

Rated Voltage: 300/300 V

Declared Performance:

Eca (EN 50575:2014/A1:2016)

Flame Retardant According to IEC/EN 60332-1-2

CONSTRUCTION:

CONDUCTOR :

BS EN 60228, Class 5 Flex Copper

INSULATION : PVC (TI3)

SHEATH : PVC (TM3)

UK
CA CE



H03V2V2-F

[illegible]

APPLICATION

It is suitable for use in closed and dry places where mechanical stresses are low, in household appliances, in steamy and humid environments. Provides durability up to +90 degrees.



REGULATORY COMPLIANCE

This cable is compliant with European Regulation EN 50575, the Construction Products Regulation.



CORE IDENTIFICATION

2 Cores: Blue, Brown.

3 Cores: Green/Yellow, Blue, Brown

4 Cores: Green/Yellow, Brown, Black, Grey.

Sheath Color: Black or White