


N05VH4-U / N05VH4-R

PVC INSULATED, PVC SHEATHED , FLAT TWIN WITH INSULATED EARTH CABLE

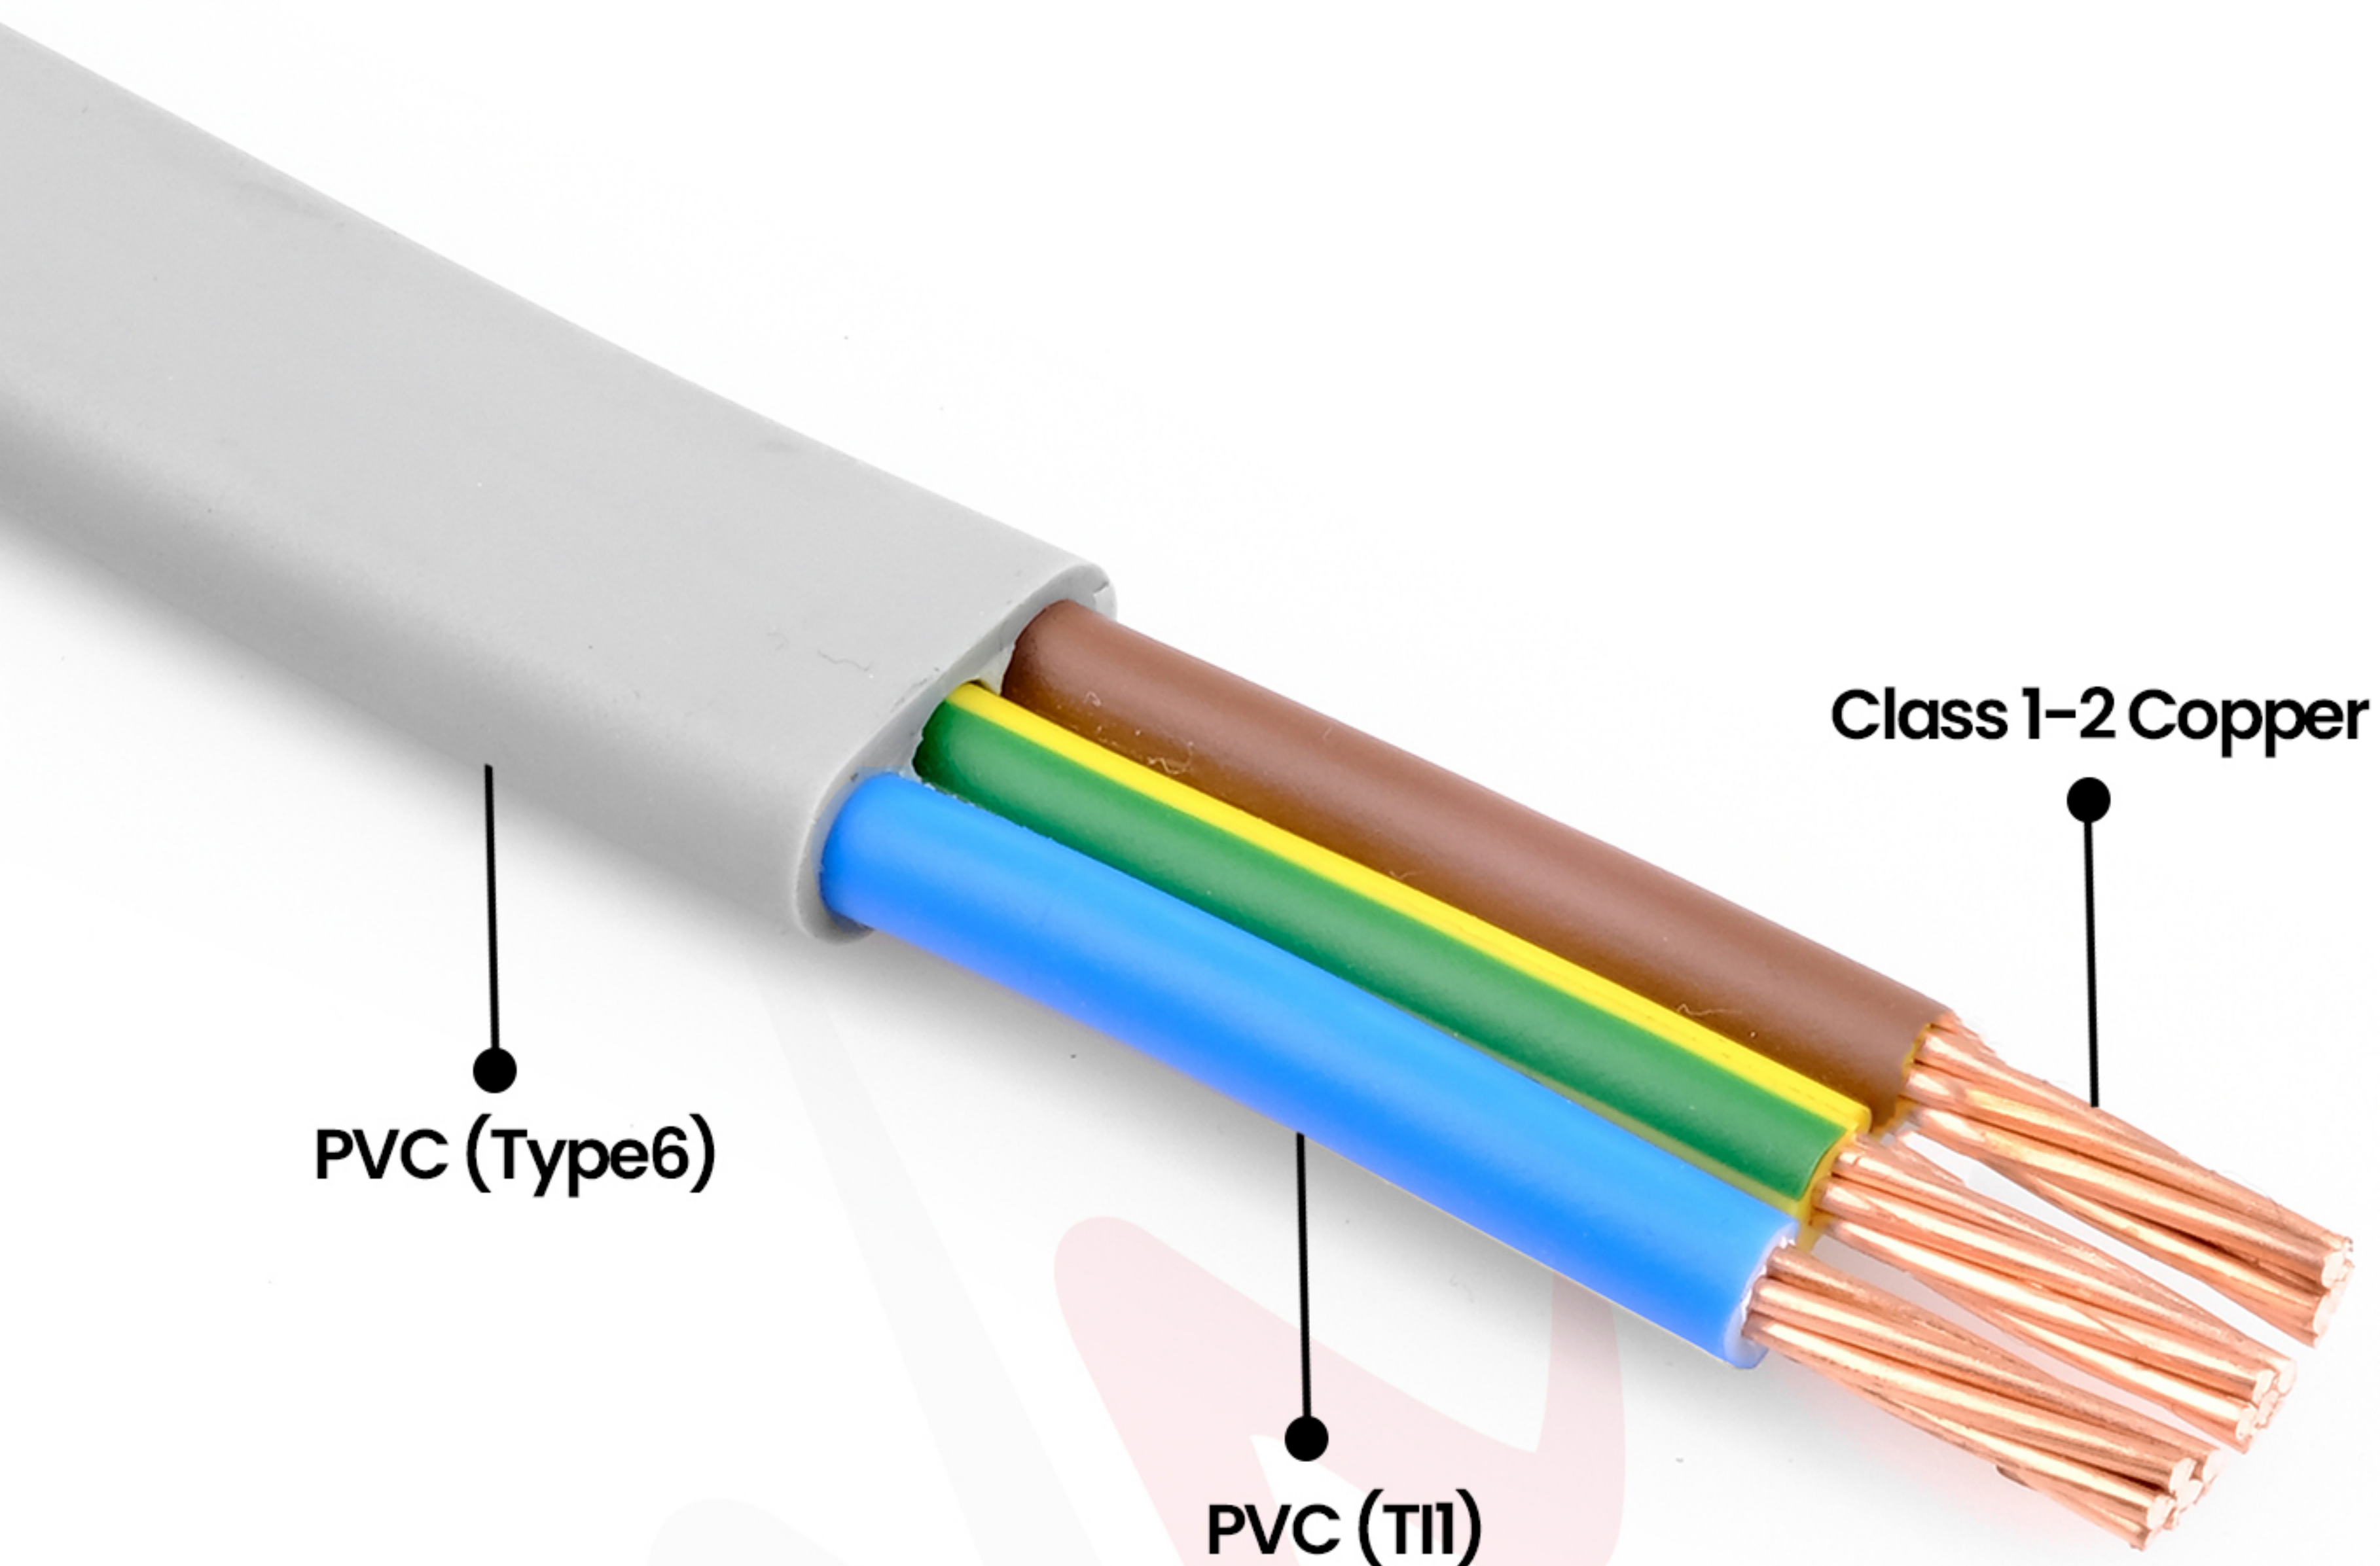

TYPE: N05VH4-U / N05VH4-R

STANDARDS: IS 2014:2013

TECHNICAL DATA:

Max. Operating Temperature : + 70 °C

Rated Voltage : 300/500 V

Declared Performance:

Eca (EN 50575:2014/A1:2016)

Flame Retardant according to IEC/EN 60332-1-2

CONSTRUCTION:

CONDUCTOR : EN 60228 Class 1-2 Copper

INSULATION : PVC (TII)

SHEATH : PVC (TYPE 6)

APPROVALS:



UK
CA CE



60

N05VWH4-U / N05VWH4-R

[illegible]

APPLICATION

It is suitable for use in dry and damp places, fixed lighting installations, pipes. It is suitable for use on fixed plaster and under plaster in structures without the risk of mechanical damage. Due to its structure, it is not suitable for laying under the ground.



REGULATORY COMPLIANCE

This cable is compliant with European Regulation EN 50575, the Construction Products Regulation.



CORE IDENTIFICATION

2 Cores: Two core with insulated earth
Brown and Blue, or for
2 × 1.0 and 2 × 1.5 cables,
Brown and Brown earth
core is Green/Yellow

3 Cores: Blue, Green/
Yellow, Brown

Sheath Color: Grey , Black, Red