


NYIFY-U

PVC INSULATED AND SHEATHED FLAT CABLES
FOR FIXED INSTALLATIONS

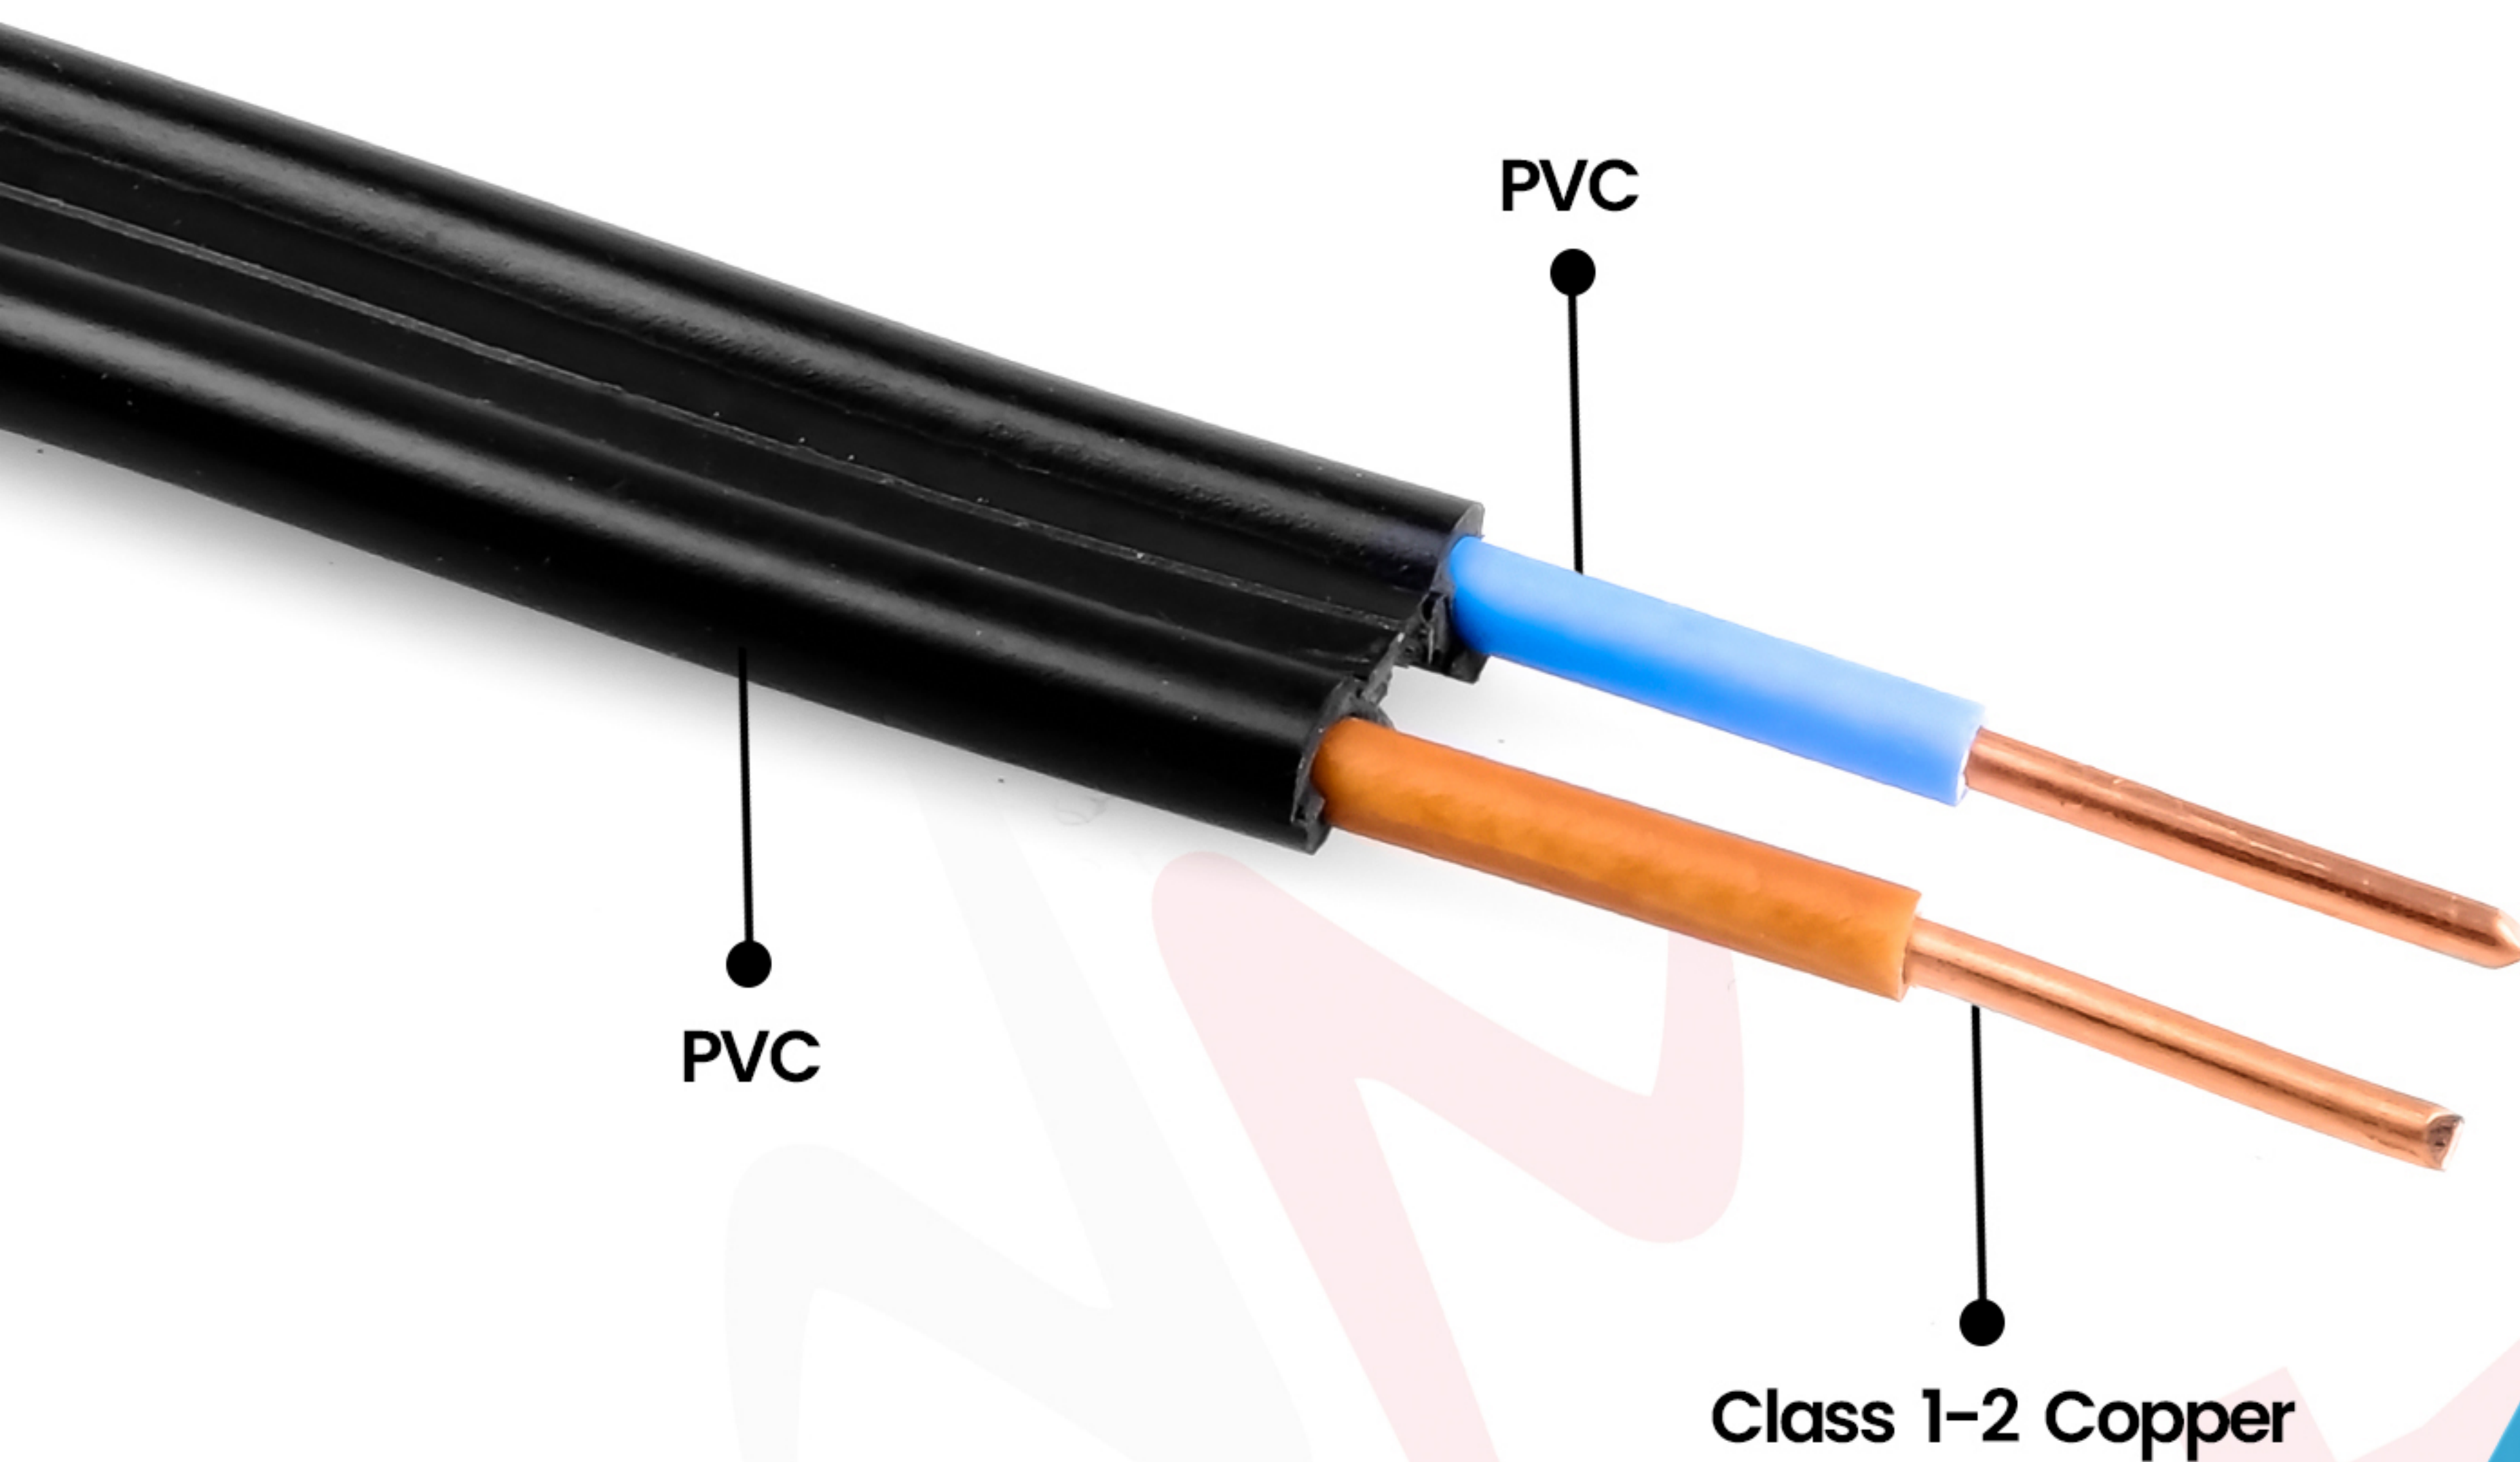

TYPE: NYIFY-U

STANDARDS: VDE 250 TEIL 201

TECHNICAL DATA:

Max. Operating Temperature: + 70 °C

Rated Voltage: 300 / 500 V

Declared Performance:

Eca (EN 50575:2014/A1:2016)

Flame Retardant according to IEC/EN 60332-1-2

CONSTRUCTION:

CONDUCTOR : EN 60228 Class 1 & 2 Copper

INSULATION : PVC

SHEATH : PVC

UK
CA CE



NYIFY-U

[illegible]

APPLICATION

It is used as a mains lighting and installation cable suitable for driving nails.



REGULATORY COMPLIANCE

This cable is compliant with European Regulation EN 50575, the Construction Products Regulation.



CORE IDENTIFICATION

2 Cores: Blue – Brown
3 Cores: Blue – Green/
 Yellow – Brown

Sheath Color: White or Black