


# CYKYLO-F

PVC INSULATED AND SHEATHED FLAT CABLES

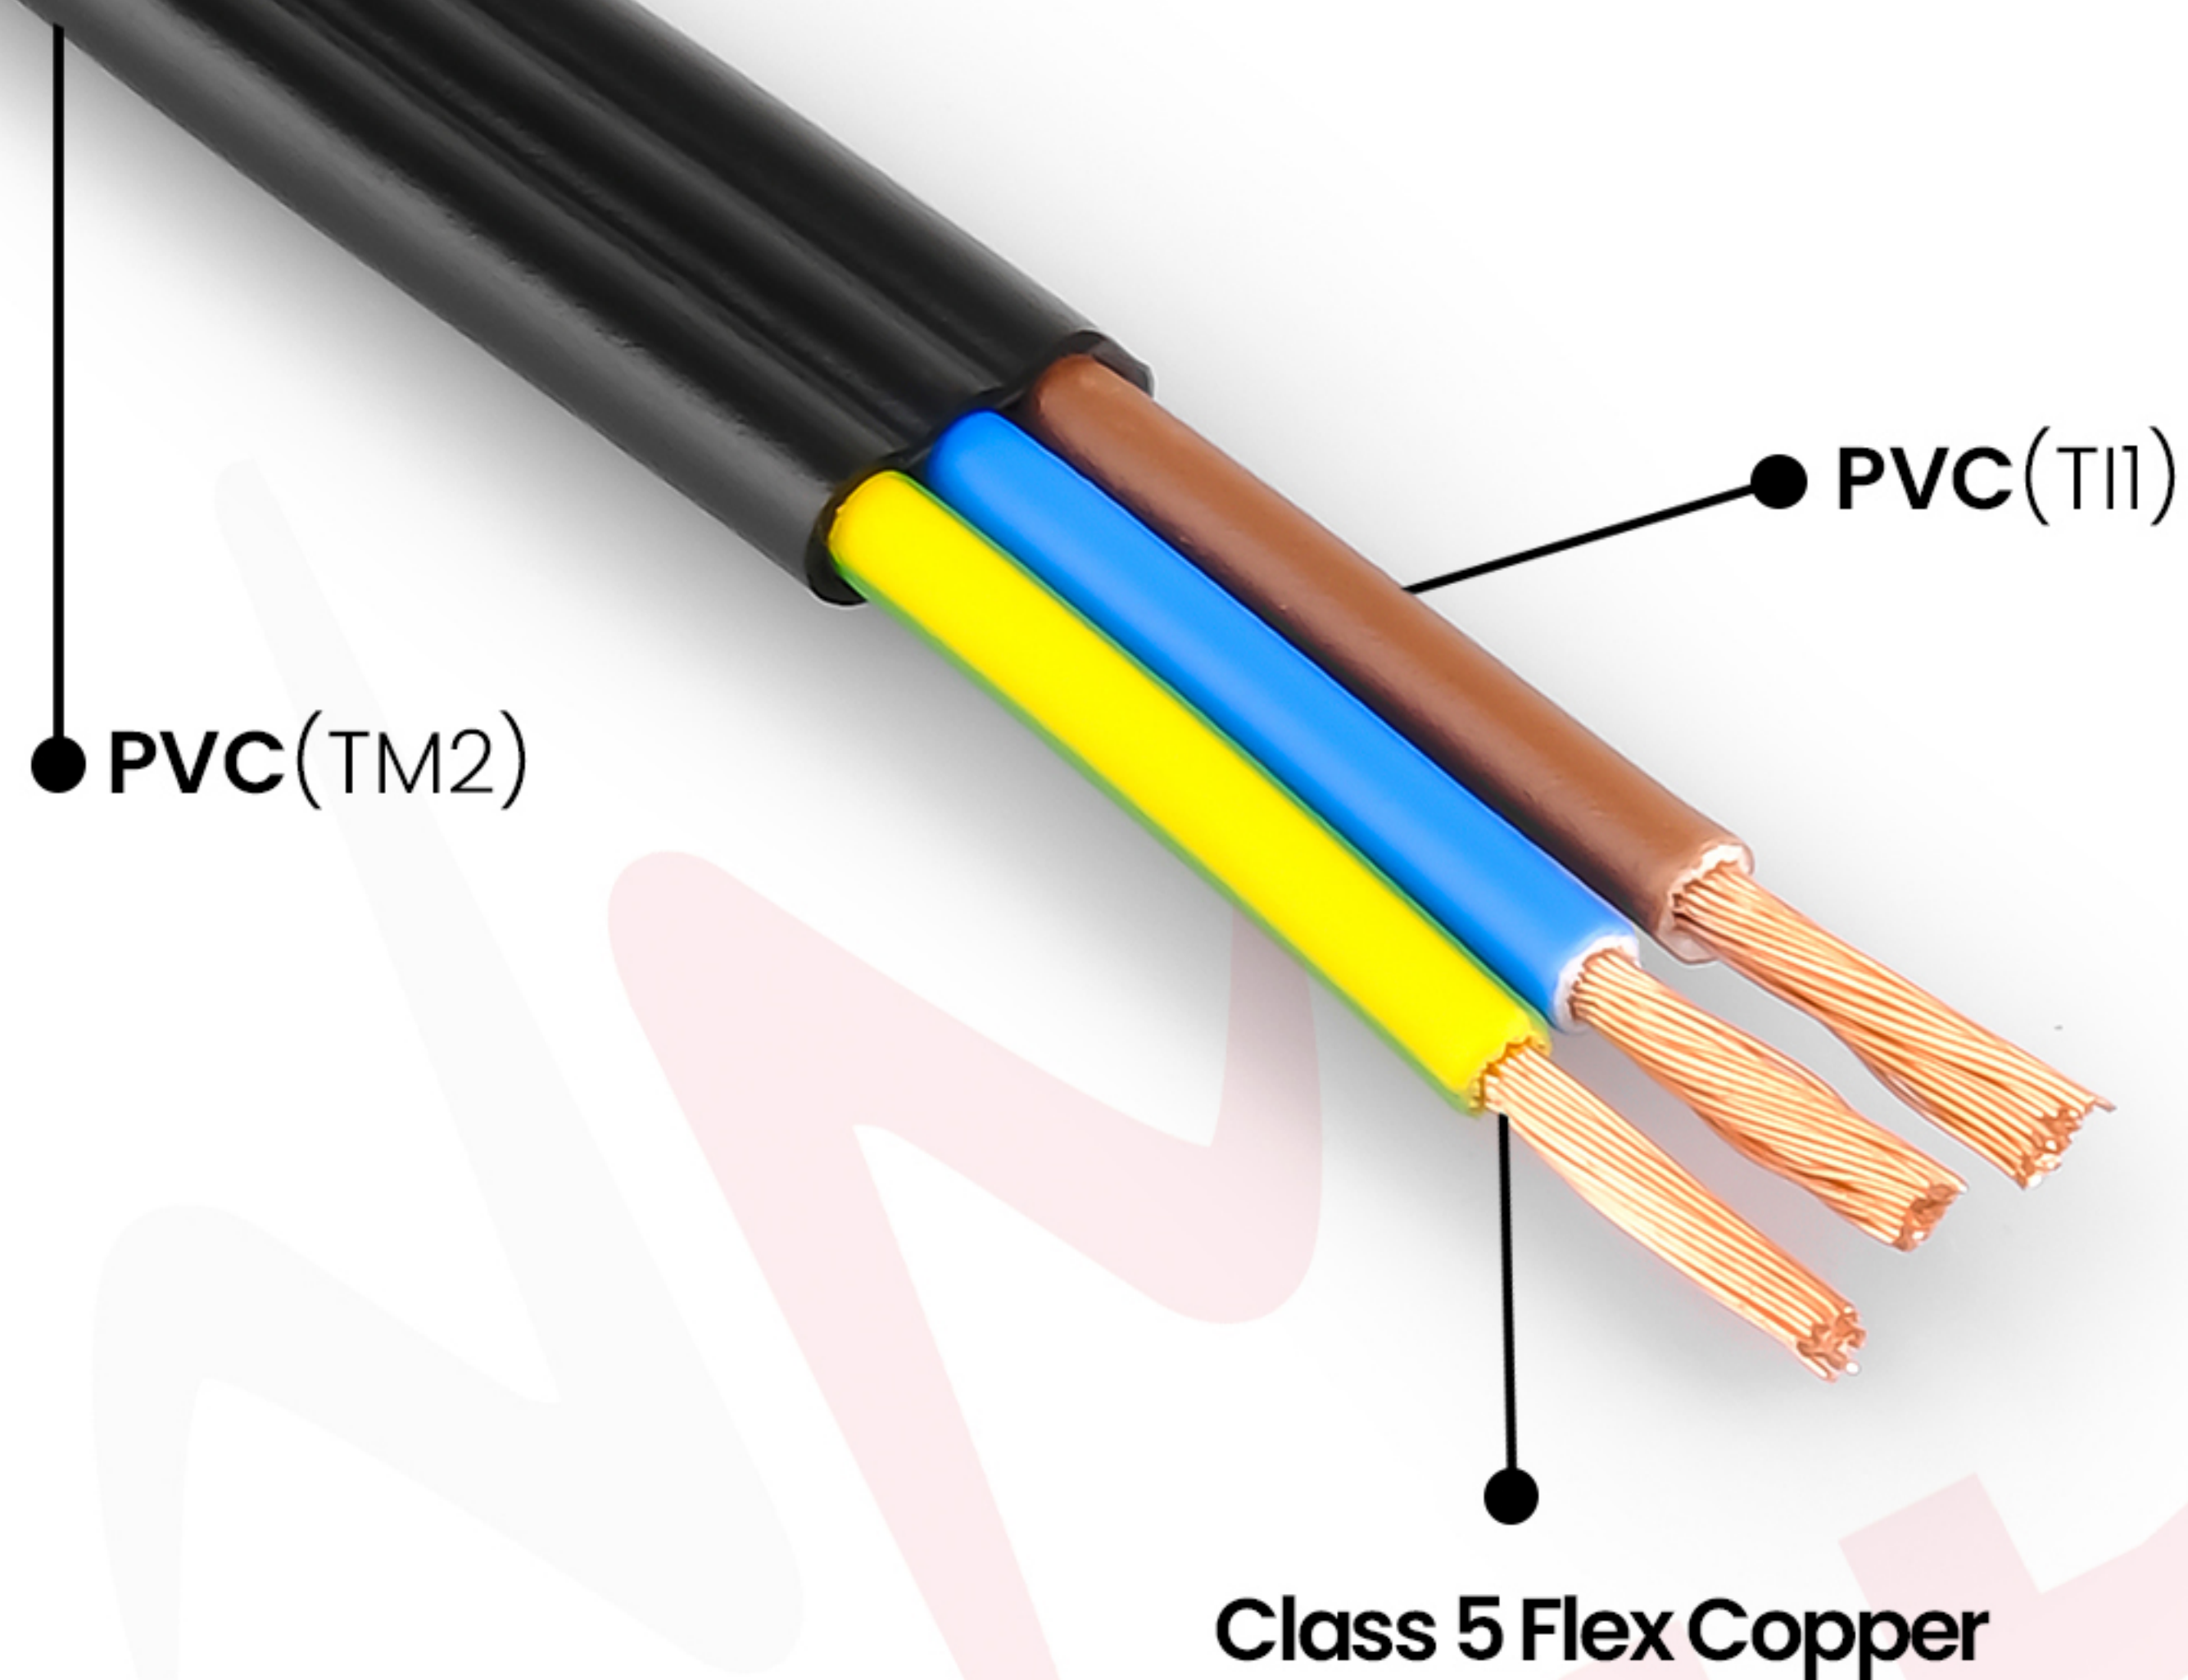

**TYPE:** CYKYLO-F

## TECHNICAL DATA:

**Max. Operating Temperature:** +70°C

**Rated Voltage:** 300 / 500 V

**Declared Performance:**

**Eca** (EN 50575:2014/A1:2016 )

Flame Retardant According to IEC/EN 60332-1-2

## CONSTRUCTION:

### CONDUCTOR

BS EN 60228 – Class 5 Flex Copper

### INSULATION

PVC (T11)

### SHEATH

PVC (TM2)

UK  
CA CE



# CYKYLO-F

[illegible]

## APPLICATION

Used as a mains, lighting and power cable, this cable is used in internal, external, underground and cable ducts where there is no excessive mechanical strain.



## REGULATORY COMPLIANCE

This cable is compliant with European Regulation EN 50575, the Construction Products Regulation.



## CORE IDENTIFICATION

**2 Cores:** Blue, Brown  
**3 Cores:** Green/Yellow,  
Blue, Brown

**Sheath Color:** Black, White or Any Color